CATALOG

>>> Miniature hydraulic station series

- 15 MPA hydraulic station ····· 01
- 20 MPA hydraulic station ····· 02
- Outboard Hydraulic Warper LD45-150 ····· 03
- Outboard Hydraulic Warper LD50-173 ····· 03

>>> NH Series Push Rod

- NH63·5T ····· 04
- NH50·3.2T ····· 05
- NH40·2T ····· 06
- NH32·1.2T ····· 07


>>> TG Series Push Rod

- TG63·4.5T ····· 08
- TG50·2.5T ····· 09
- TGH50Welded type·2.5T ····· 11
- TG40·1.8T ····· 13
- TGH40Welded type·1.8T ····· 14
- TG32·1.0T ····· 16
- TG20·0.4T ····· 18
- TG32-350 Fission push rod ····· 19
- TG40-60F Fission push rod ····· 19
- Carrier core ····· 20

15MPa Hydraulic Station



HS04-350

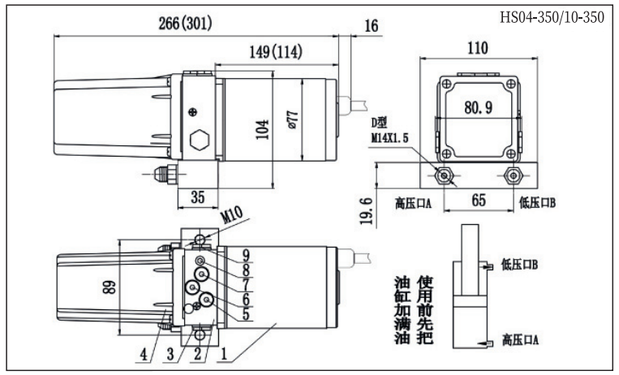



HS10-350

Fuction

1. Motor：12V/24V/48V
2. Gear pump valve body assembly: self-locking, reversing, overflow pressure highly integrated。
3. Retract the one-way plug: there is a filter net, and it is cleaned every six months。
4. Oil sac cover: inside oil sac, 350 ml
5. Retractable pressure adjusting plug: unscrew the plug, adjust the nut inside, tighten the retractable force increases, loosen the retractable force decreases, loosen the retractable force decreases
6. Tank filler plug: the oil in the tank is added from here, and the hydraulic oil is replaced from here
7. Jacking pressure adjustment plug: unscrew the plug, adjust the nut inside, tighten the jacking force increases, loosen the jacking force decreases。
8. Safety valve: loosen the safety valve to enable the ejector rod to recover automatically under the action of the load capacity. The next time you use it, be sure to screw it tight before using it。
9. Jacking unidirectional plug: there is a filter net and it is cleaned once every six months
10. Lower connecting port of oil cylinder: high pressure port 11. Upper connecting port of cylinder: low pressure port

Item	HS04-350	HS10-350
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Oil voltage	350ml	350ml
Max presure	15MPa	15MPa
displacement	9ml/s	19ml/s
Pump type	Bi-directional gear pump	Bi-directional gear pump
specification	L-HV 46#	L-HV 46#
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	3.1KG/3.3KG	4.1KG/4.4KG
Packing Size	30×14×13CM	30×20×13CM

20MPa Hydraulic Station


This micro hydraulic station, DC motor drive, by controlling the direct current motor forward and reverse, two-way pressure output Internal integration of relief valve, one-way valve, reversing valve, safety valve, two-way pressure self-locking Widely used in a variety of DC micro-hydraulic machinery, such as robot, electro-hydraulic platform, electric dump truck, marine hydraulic system and automotive hydraulic control system Pressure output interface and mounting dimensions can be customized according to customer.




HS40-600



HS40-600X

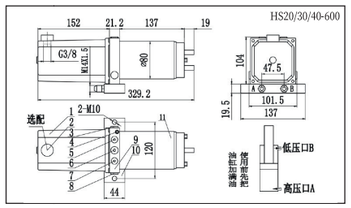

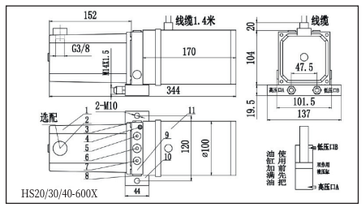

Fuction


1. fuel tank： volume600ml.
2. fuel tank cap：screw thread G3/8.
3. Lifting one-way plug：One-way valve inside.
4. Relief valve：When the electric push rod is lifted and cannot be lowered and retracted due to an unexpected cause,the screw relief valve will be released. then jacking rod will automatic recovery be sure to tighten the next time you use it.
5. Lifting pressure regulating plug：Unscrew the plug, adjust the nut inside, tighten the lifting force of the top, and reduce the lifting force of the screw.
6. Refueling plug ： screw thread G1/8.
7. Retract pressure adjusting plug：Open the plug and adjust the nut.
8. retracted one-way plug：one-way valve inside.
9. valve body.
10. Base：there is oil hose connector and mounting fixed hole level.
11. motor: DC 24V/48V.
12. motor sealing cover：optional.

Item	HS40-600	HS40-600X
Voltage	DC24V/48V	AC220V/AC380V
Power	800W	500W
Oil voltage	600ml	600ml
Max presure	20MPa	20MPa
displacement	0.38cc/0.6cc/0.88cc	0.38cc/0.6cc/0.88cc
Pump type	Bi-directional gear pump	Bi-directional gear pump
specification	L-HV 46#	L-HV 46#
temperature	-30~70°C	-30~70°C
Frequency	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5
N.W/G.W	4.9KG/5.2KG	7.4KG/7.7KG
Packing Size	41×20×13CM	41×20×13CM

Outboard Hydraulic Warper
LD45-150



LD45-150

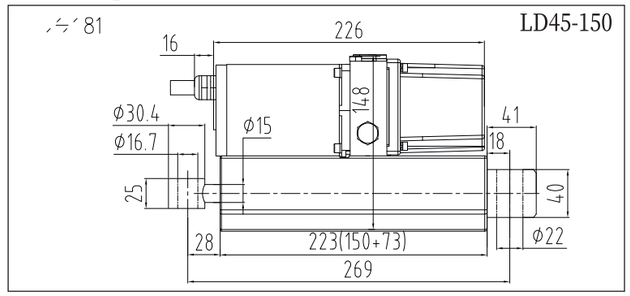


Item	LD45-150
Voltage	DC12V/24V/48V
Power	300W
Stroke	150mm(The longest custom stroke is 250mm)
Top of the lift	1.2T
Load speed	12-14mm/s
temperature	-30~70°C
Noise level	Less than 75 decibels
Waterproof rate	IPX6
N.W/G.W/Packing size	5.2kg/5.5kg/61x20x13cm

Outboard Hydraulic Warper
LD50-173



LD50-173

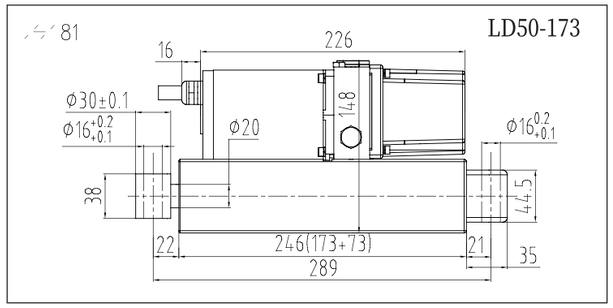


Item	LD50-173
Voltage	DC12V/24V/48V
Power	300W
Stroke	173mm(The longest custom stroke is 280mm)
Top of the lift	1.8T
Load speed	10-11mm/s
temperature	-30~70°C
Noise level	Less than 75 decibels
Waterproof rate	IPX6
N.W/G.W/Packing size	5.8kg/6.1kg/61x20x13cm

NH Series Push Rod

NH63S




NH63S

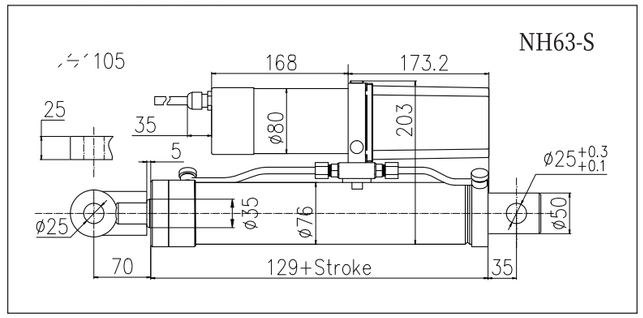

Item	NH63 Customize	NH63 Customize	NH63 Customize
voltage	DC24V/48V	DC24V/48V	DC24V/48V
power	800W	1000W	1200W
displacement	0.38CC	0.6CC	0.88CC
Stroke	100-450mm	100-450mm	100-450mm
Top of the lift	5T	5T	5T
Retraction force	3.5T	3.5T	3.5T
Load speed(load 3.7T)	6-7mm/s	10-11mm/s	14-15mm/s
temperature	-30~70° C	-30~70° C	-30~70° C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
Weight of cylinder per 10 CM stroke	1.869KG		



NH63-400

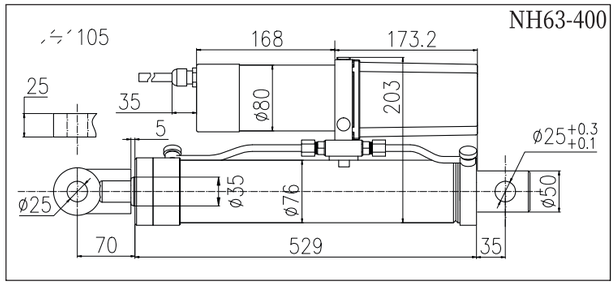


Item	NH63-400	NH63-400	NH63-400
voltage	DC24V/48V	DC24V/48V	DC24V/48V
power	800W	1000W	1200W
displacement	0.38CC	0.6CC	0.88CC
Stroke	400mm	400mm	400mm
Top of the lift	5T	5T	5T
Retraction force	3.5T	3.5T	3.5T
Load speed(load 3.7T)	6-7mm/s	10-11mm/s	14-15mm/s
temperature	-30~70° C	-30~70° C	-30~70° C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
N.W/G.W	19.54KG/20.1KG	19.54KG/20.1KG	19.54KG/20.1KG
Packing Size	80×23×15CM	80×23×15CM	80×23×15CM

NH50S



NH50S

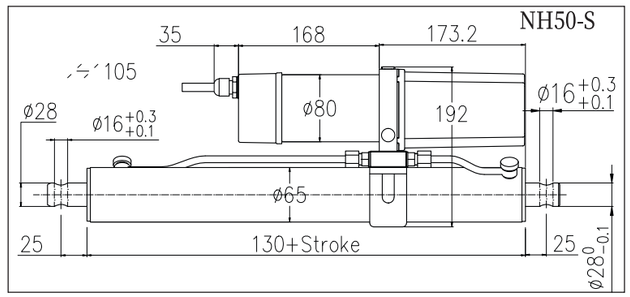


Item	NH50 Customize	NH50 Customize	NH50 Customize
voltage	DC24V/48V	DC24V/48V	DC24V/48V
power	800W	1000W	1200W
displacement	0.38CC	0.6CC	0.88CC
Stroke	50~700mm	50~700mm	50~700mm
Top of the lift	3.2T	3.2T	3.2T
Retraction force	2T	2T	2T
Load speed(load 2.2T)	10−11mm/s	16−17mm/s	23−24mm/s
temperature	−30~70° C	−30~70° C	−30~70° C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
Weight of cylinder per 10 CM stroke		1.47KG	

NH40S




NH40s

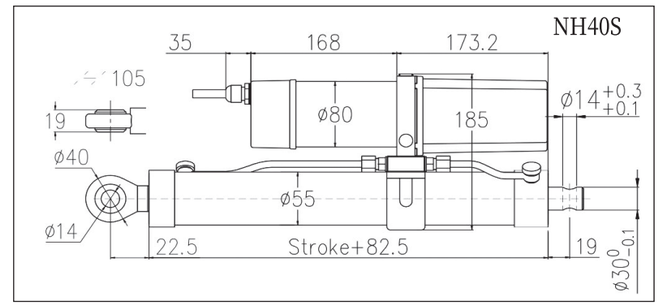

Item	NH40 Customize	NH40 Customize	NH40 Customize
Voltage	DC24V/48V	DC24V/48V	DC24V/48V
Power	800W	1000W	1200W
displacement	0.38cc	0.6cc	0.88cc
Stroke	50-1000mm	50-1000mm	50-1000mm
Top of the lift	2T	2T	2T
Retraction force	1.3T	1.3T	1.3T
Load speed	16-18mm/s	25-27mm/s	36-38mm/s
temperature	-30~70°C	-30~70°C	-30~70°C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
Weight of cylinder per 10 CM stroke		1.177KG	




NH50-200

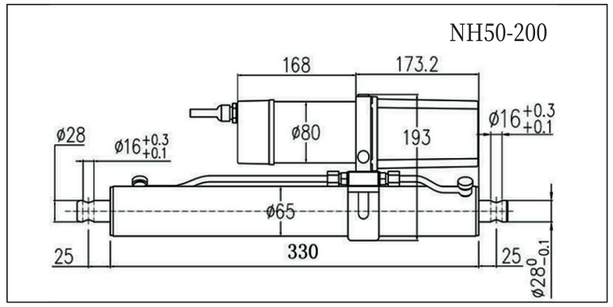

Item	NH50−200	NH50−200	NH50−200
voltage	DC24V/48V	DC24V/48V	DC24V/48V
power	800W	1000W	1200W
displacement	0.38CC	0.6CC	0.88CC
Stroke	200mm	200mm	200mm
Top of the lift	3.2T	3.2T	3.2T
Retraction force	2T	2T	2T
Load speed(load 3.7T)	10−11mm/s	16−17mm/s	23−24mm/s
temperature	−30~70° C	−30~70° C	−30~70° C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
N.W/G.W	12.5KG/13KG	12.5KG/13KG	12.5KG/13KG
Packing Size	80×23×15CM	80×23×15CM	80×23×15CM



NH40-500

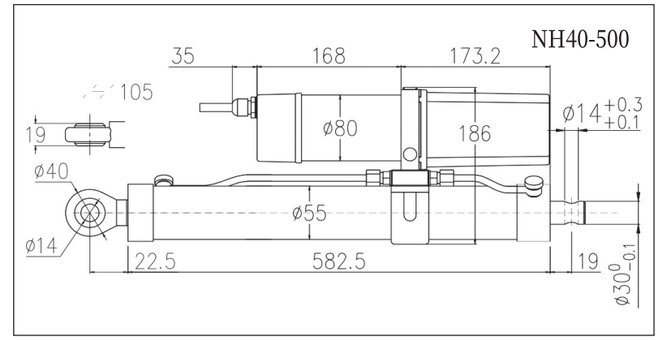


Item	NH40-500	NH40-500	NH40-500
Voltage	DC24V/48V	DC24V/48V	DC24V/48V
Power	800W	1000W	1200W
displacement	0.38cc	0.6cc	0.88cc
Stroke	500mm	500mm	500mm
Top of the lift	2T	2T	2T
Retraction force	1.3T	1.3T	1.3T
Load speed	16-18mm/s	25-27mm/s	36-38mm/s
temperature	-30~70°C	-30~70°C	-30~70°C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
N.W/G.W		13.1KG/13.6KG	
Packing Size		80×23×15CM	

NH32S




NH32S

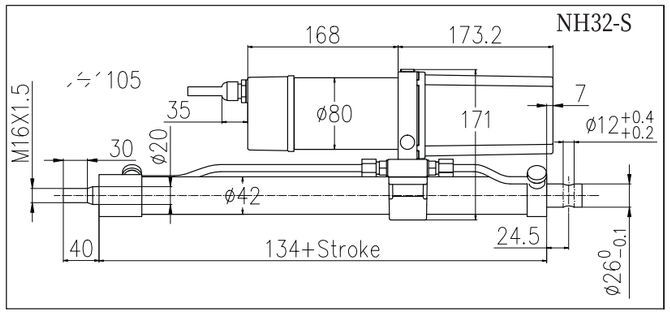

Item	NH32 Customize	NH32 Customize	NH32 Customize
voltage	DC24V/48V	DC24V/48V	DC24V/48V
power	800W	1000W	1200W
displacement	0.38CC	0.6CC	0.88CC
Stroke	50~800mm	50~800mm	50~800mm
Top of the lift	1.2T	1.2T	1.2T
Retraction force	700KG	700KG	700KG
Load speed(load 1.7T)	25-26mm/s	39-40mm/s	55-56mm/s
temperature	-30~70° C	-30~70° C	-30~70° C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
Weight of cylinder per 10 CM stroke	0.703KG		



NH32-800

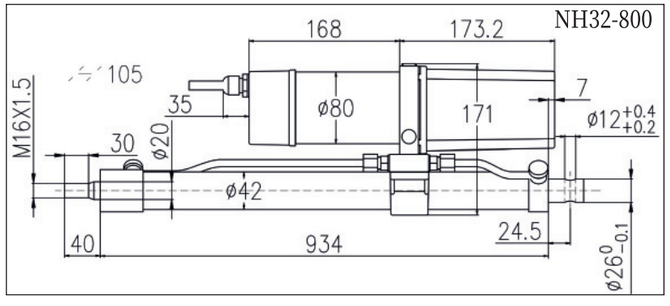


Item	NH32-800	NH32-800	NH32-800
Voltage	DC24V/48V	DC24V/48V	DC24V/48V
Power	800W	1000W	1200W
displacement	0.38cc	0.6cc	0.88cc
Stroke	800mm	800mm	800mm
Top of the lift	1.2T	1.2T	1.2T
Retraction force	0.7T	0.7T	0.7T
Load speed	25-26mm/s	39-40mm/s	55-56mm/s
temperature	-30~70°C	-30~70°C	-30~70°C
Frequency	6min/each time	6min/each time	6min/each time
Waterproof rate	IPX5	IPX5	IPX5
N.W/G.W	12.62KG/13.32KG		
Packing Size	105×13×20CM		

63 cylinder series




TG63s

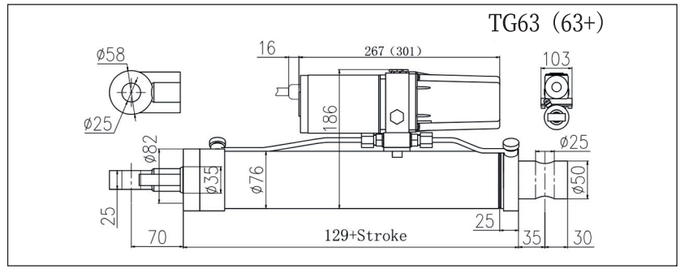

Item	TG63 Customize	TG63 Customize
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	50-300mm	50-300mm
Top of the lift	4.5T	4.5T
Retraction force	2.8T	2.8T
Load speed	2-3mm/s	6-7mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
Weight of cylinder per 10 CM stroke	1.869KG	



TG63-200

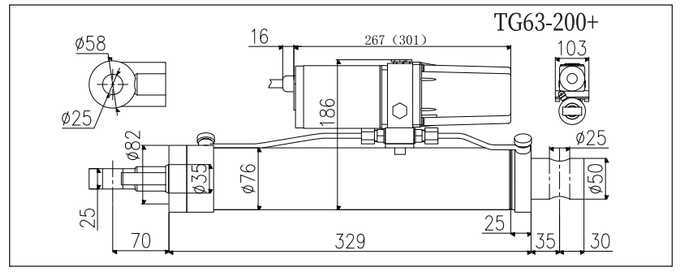


Item	TG63-200	TG63-200+
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	200mm	200mm
Top of the lift	4.5T	4.5T
Retraction force	2.8T	2.8T
Load speed	2-3mm/s	6-7mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	14KG/14.5KG	15KG/15.5KG
Packing Size	80×23×15CM	80×23×15CM

TG Series Push Rod

50 cylinder series




TG50s

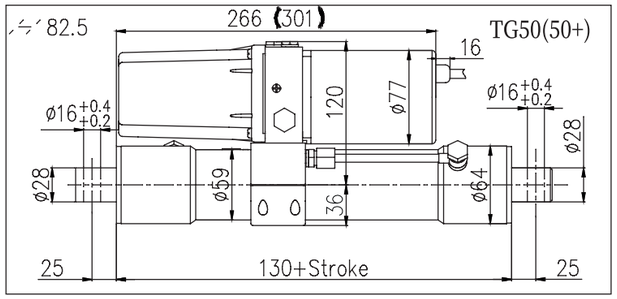

Item	TG50 Customize	TG50+Customize
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	50~400mm	50~400mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5~6mm/s	10~12mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
Weight of cylinder per 10 CM stroke	1.088KG	




TG50-180

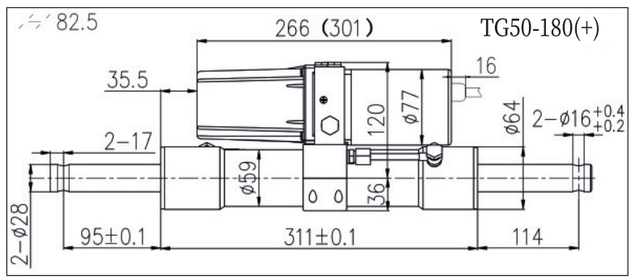

Item	TG50-180	TG50-180+
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	180mm	180mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5~6mm/s	10~12mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	9.2KG/9.5KG	10.2KG/10.5KG
Packing Size	61×20×13CM	61×20×13CM




TG50-200

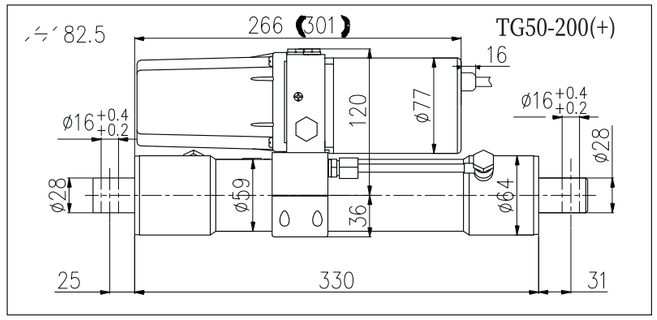

Item	TG50-200	TG50-200+
voltage	DC220V/DC12V/24V/48V	DC220V/DC24/48V
power	300W	800W
Stroke	200mm	200mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5~6mm/s	10~12mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	8.8KG/9.1KG	9.8KG/10.1KG
Packing Size	40×20×13CM	40×20×13CM




TG50-285

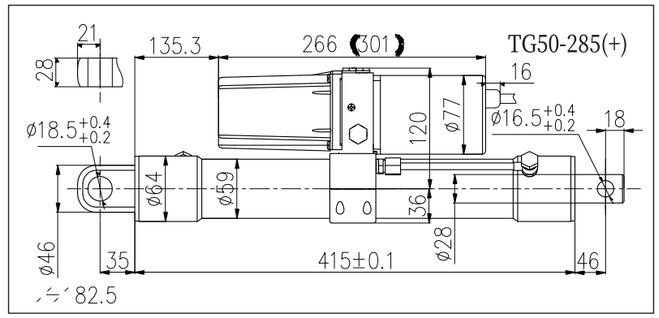

Item	TG50-285	TG50-285+
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	285mm	285mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5-6mm/s	10-11mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	10KG/10.4KG	11KG/11.4KG
Packing Size	61×20×13CM	61×20×13CM




TG50-450X

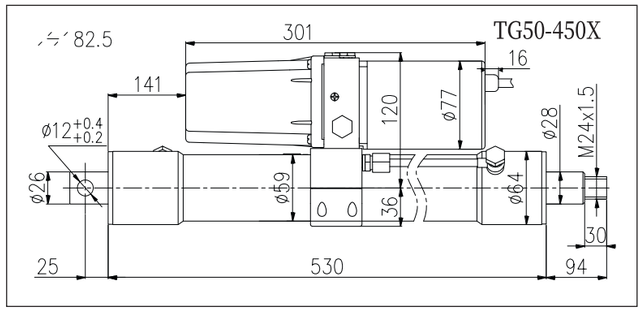

Item	TG50-450X	TG50-450X
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	450mm	450mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5-6mm/s	10-11mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	12.1KG/12.6KG	13.1KG/13.6KG
Packing size	80*23*15CM	80*23*15CM




TGH50S

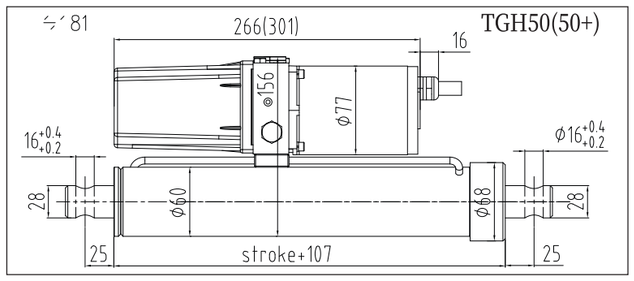

Item	TGH50S Customize	
Voltage	DC220V/12V/24V/48V	DC220V/24V/48V
Power	300W	800W
Stroke	50-450mm	50-450mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5-6mm/s	10-11mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6




TGH50-150

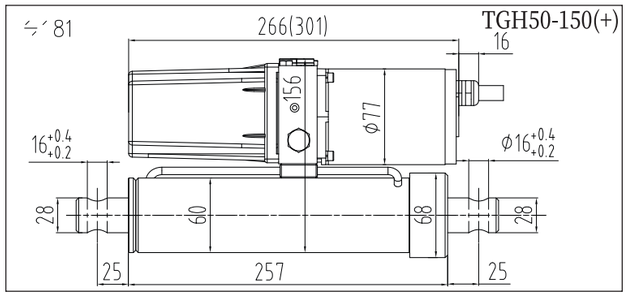

Item	TGH50-150	
Voltage	DC220V/12V/24V/48V	DC220V/24V/48V
Power	300W	800W
Stroke	150mm	150mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5-6mm/s	10-11mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W/Packing size	6.7kg/7kg/40x20x13cm	7.7kg/8kg/40x20x13cm



TGH50-300

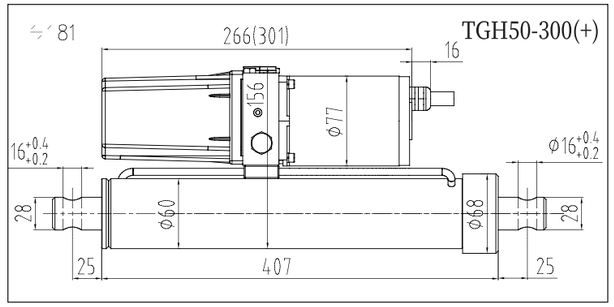


Item	TGH50-300	
Voltage	DC220V/12V/24V/48V	DC220V/24V/48V
Power	300W	800W
Stroke	300mm	300mm
Top of the lift	2.5T	2.5T
Retraction force	1.5T	1.5T
Load speed	5-6mm/s	10-11mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W/Packing size	8.5kg/9kg/61x20x13cm	9kg/9.3kg/61x20x13cm

40 cylinder series




TG40s

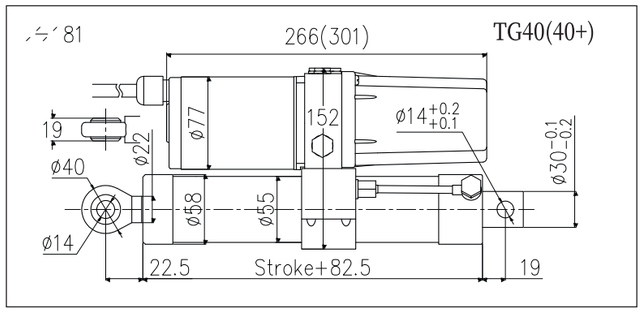

Item	TG40 Customize	TG40 Customize
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	50-800mm	50-800mm
Top of the lift	1.8T	1.8T
Retraction force	1T	1T
Load speed	7-8mm/s	15-18mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
Weight of cylinder per 10 CM stroke	1.177KG	




TG40-500

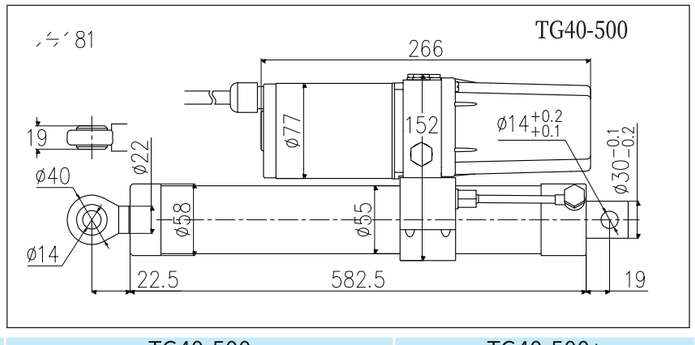

Item	TG40-500	TG40-500+
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	500mm	500mm
Top of the lift	1.8T	1.8T
Retraction force	1T	1T
Load speed	7-8mm/s	15-18mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	10.9KG/11.4KG	11.9KG/12.4KG
Packing size	80*23*15CM	80*23*15CM




TG40-203X

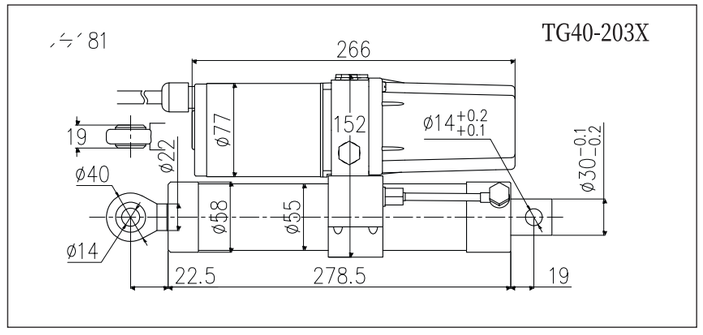

Item	TG40-203X	
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	203mm	203mm
Top of the lift	1T	1.8T
Retraction force	0.7T	1T
Load speed	16-17mm/s	15-18mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	7.4KG/7.7KG	8.4KG/8.7KG
Packing size	40*20*13CM	40*20*13CM




TGH40S

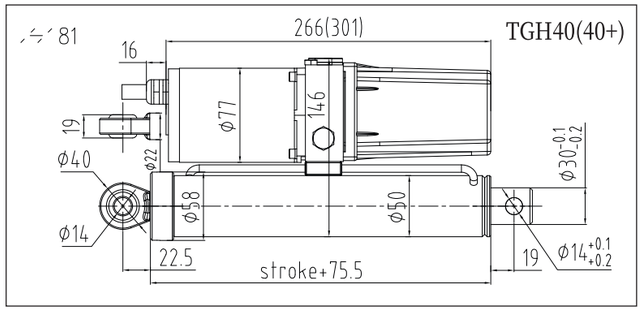

Item	TGH40S Customize	
Voltage	DC220V/12V/24V/48V	DC220V/24V/48V
Power	300W	800W
Stroke	50-800mm	50-800mm
Top of the lift	1.8T	1.8T
Retraction force	1T	1T
Load speed	7-8mm/s	15-18mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6




TGH40-203X

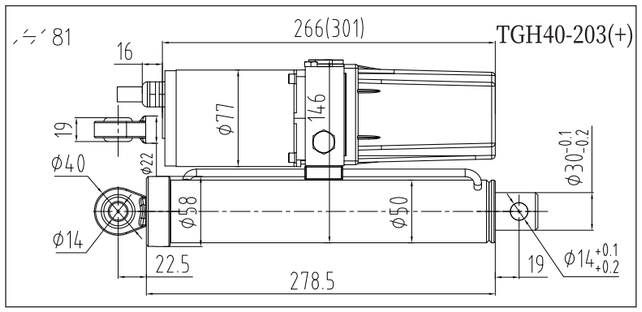

Item	TGH40-203X	
Voltage	DC220V/12V/24V/48V	DC220V/12V/24V/48V
Power	300W	300W
Stroke	203mm	203mm
Top of the lift	1T	1T
Retraction force	0.7T	0.7T
Load speed	16-17mm/s	16-17mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	
Waterproof rate	IPX6	IPX6
N.W/G.W/Packing size	7.3kg/7.6kg/40x20x13cm	7.3kg/7.6kg/40x20x13cm



TGH40-300

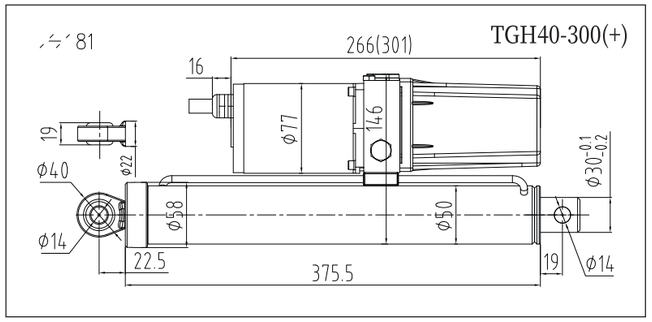


Item	TGH40-300	
Voltage	DC220V/12V/24V/48V	DC220V/24V/48V
Power	300W	800W
Stroke	300mm	300mm
Top of the lift	1.8T	1.8T
Retraction force	1T	1T
Load speed	7-8mm/s	15-18mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W/Packing size	7.5kg/7.8kg/61x20x13cm	8.5kg/8.8kg/61x20x13cm

32 cylinder series




TG32s

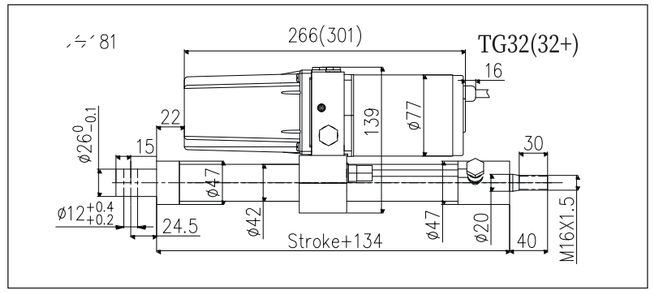

Item	TG32 Customize	TG32+Customize
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	50~800mm	50~800mm
Top of the lift	1T	1T
Retraction force	0.5T	0.5T
Load speed	10~12mm/s	20~25mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
Weight of cylinder per 10 CM stroke	0.703KG	




TG32-300X

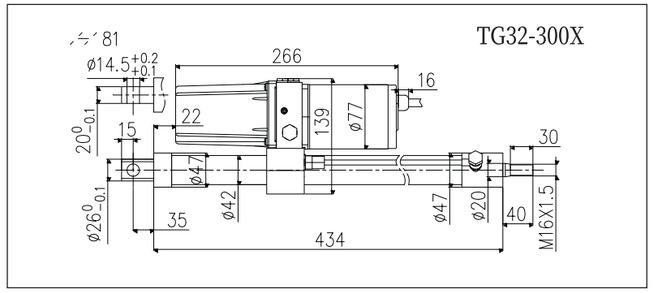

Item	TG32-300X	
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	300mm	300mm
Top of the lift	500KG	1T
Retraction force	200KG	0.5T
Load speed	20-25mm/s	20~25mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	7.4KG /7.9KG	8.4KG /8.9KG
Packing size	80*20*13CM	80*20*13CM




TG32-350X

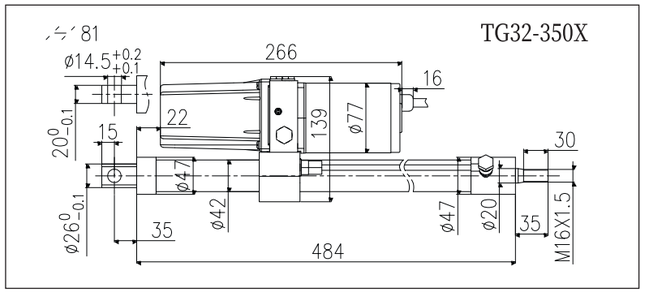

Item	TG32-350X	
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	350mm	350mm
Top of the lift	500KG	1T
Retraction force	200KG	0.5T
Load speed	20-25mm/s	20~25mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	7.8KG/8.3KG	8.8KG/9.3KG
Packing size	80*20*13CM	80*20*13CM



TG32-500

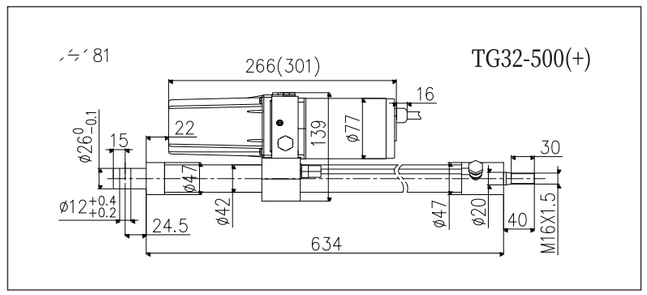


Item	TG32-500	TG32-500+
voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
power	300W	800W
Stroke	500mm	500mm
Top of the lift	1T	1T
Retraction force	0.5T	0.5T
Load speed	10~12mm/s	20~25mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	4min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	8.9KG/9.4KG	10.9KG/11.4KG
Packing Size	80×20×13CM	80×20×13CM

20 cylinder series




TG20s

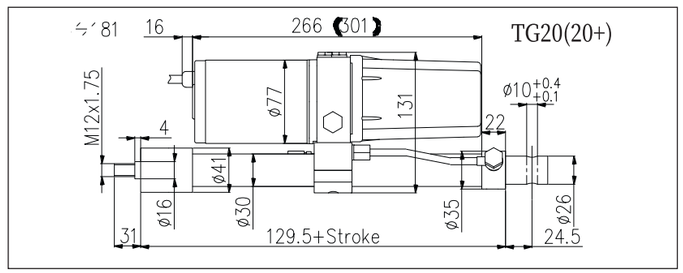

Item	TG20 Customize	TG20+Customize
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	50~800mm	50~800mm
Top of the lift	400KG	400KG
Retraction force	110KG	110KG
Load speed	26~30mm/s	50~58mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
Weight of cylinder per 10 CM stroke	0.542KG	



TG20-485

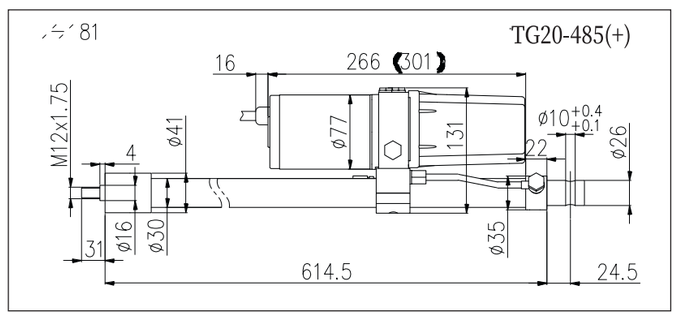


Item	TG20-485	TG20-485+
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	485mm	485mm
Top of the lift	400KG	400KG
Retraction force	110KG	110KG
Load speed	26-30mm/s	50-58mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	6.7KG/7.2KG	7.7KG/8.2KG
Packing Size	80×20×13CM	80×20×13CM

TG32-350 Fission push rod



TG32-350

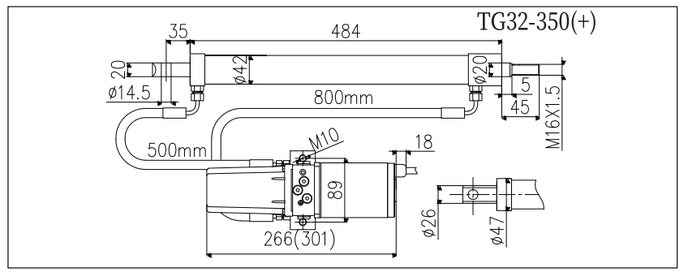


Item	TG32-350 Fission push rod	
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	350mm	350mm
Top of the lift	1T	1T
Retraction force	0.5T	0.5T
Load speed	10-12mm/s	20-25mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	8KG/8.5KG	9KG/9.5KG
Packing Size	80×20×13CM	80×20×13CM

Carrier core



LD35-150

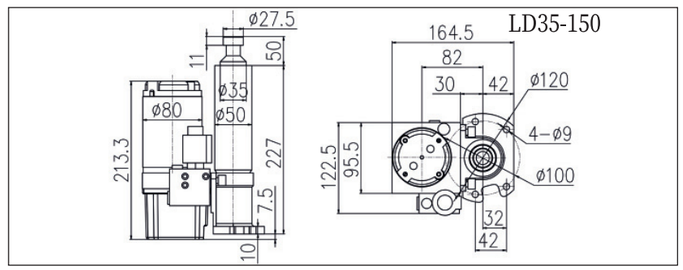


Item	LD35-150
Voltage	DC24V/48V
Power	500W
Stroke	150mm
Top of the lift	2T
Oil cylinder form	Single action
Load speed	12-20mm/s
temperature	-30~70°C
Frequency	4min/each time
Waterproof rate	IPX6
N.W/G.W	6.7KG/7KG
Packing Size	61×20×13CM

TG40-60F Fission push rod



TG40-60F

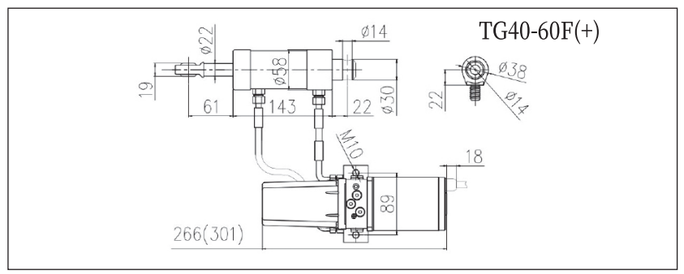

Item	TG40-60F Fission push rod	
Voltage	DC220V/DC12V/24V/48V	DC220V/DC24V/48V
Power	300W	800W
Stroke	600mm	60mm
Top of the lift	1.8T	1.8T
Retraction force	1T	1T
Load speed	7-8mm/s	15-18mm/s
temperature	-30~70°C	-30~70°C
Frequency	4min/each time	6min/each time
Waterproof rate	IPX6	IPX6
N.W/G.W	5.9KG/6.4KG	6.9KG/7.4KG
Packing Size	80×20×13CM	80×20×13CM